

ULTRAVIOLET CROSSLINKING

**A COST EFFECTIVE
ALTERNATIVE TO E-
BEAM CROSSLINKING
OF PE AND HFFR**

Maurice Alphonso


Technical Director



AMI "Polymer in Cables" Conference

14 - 16 September 2021

PE Crosslinking methods

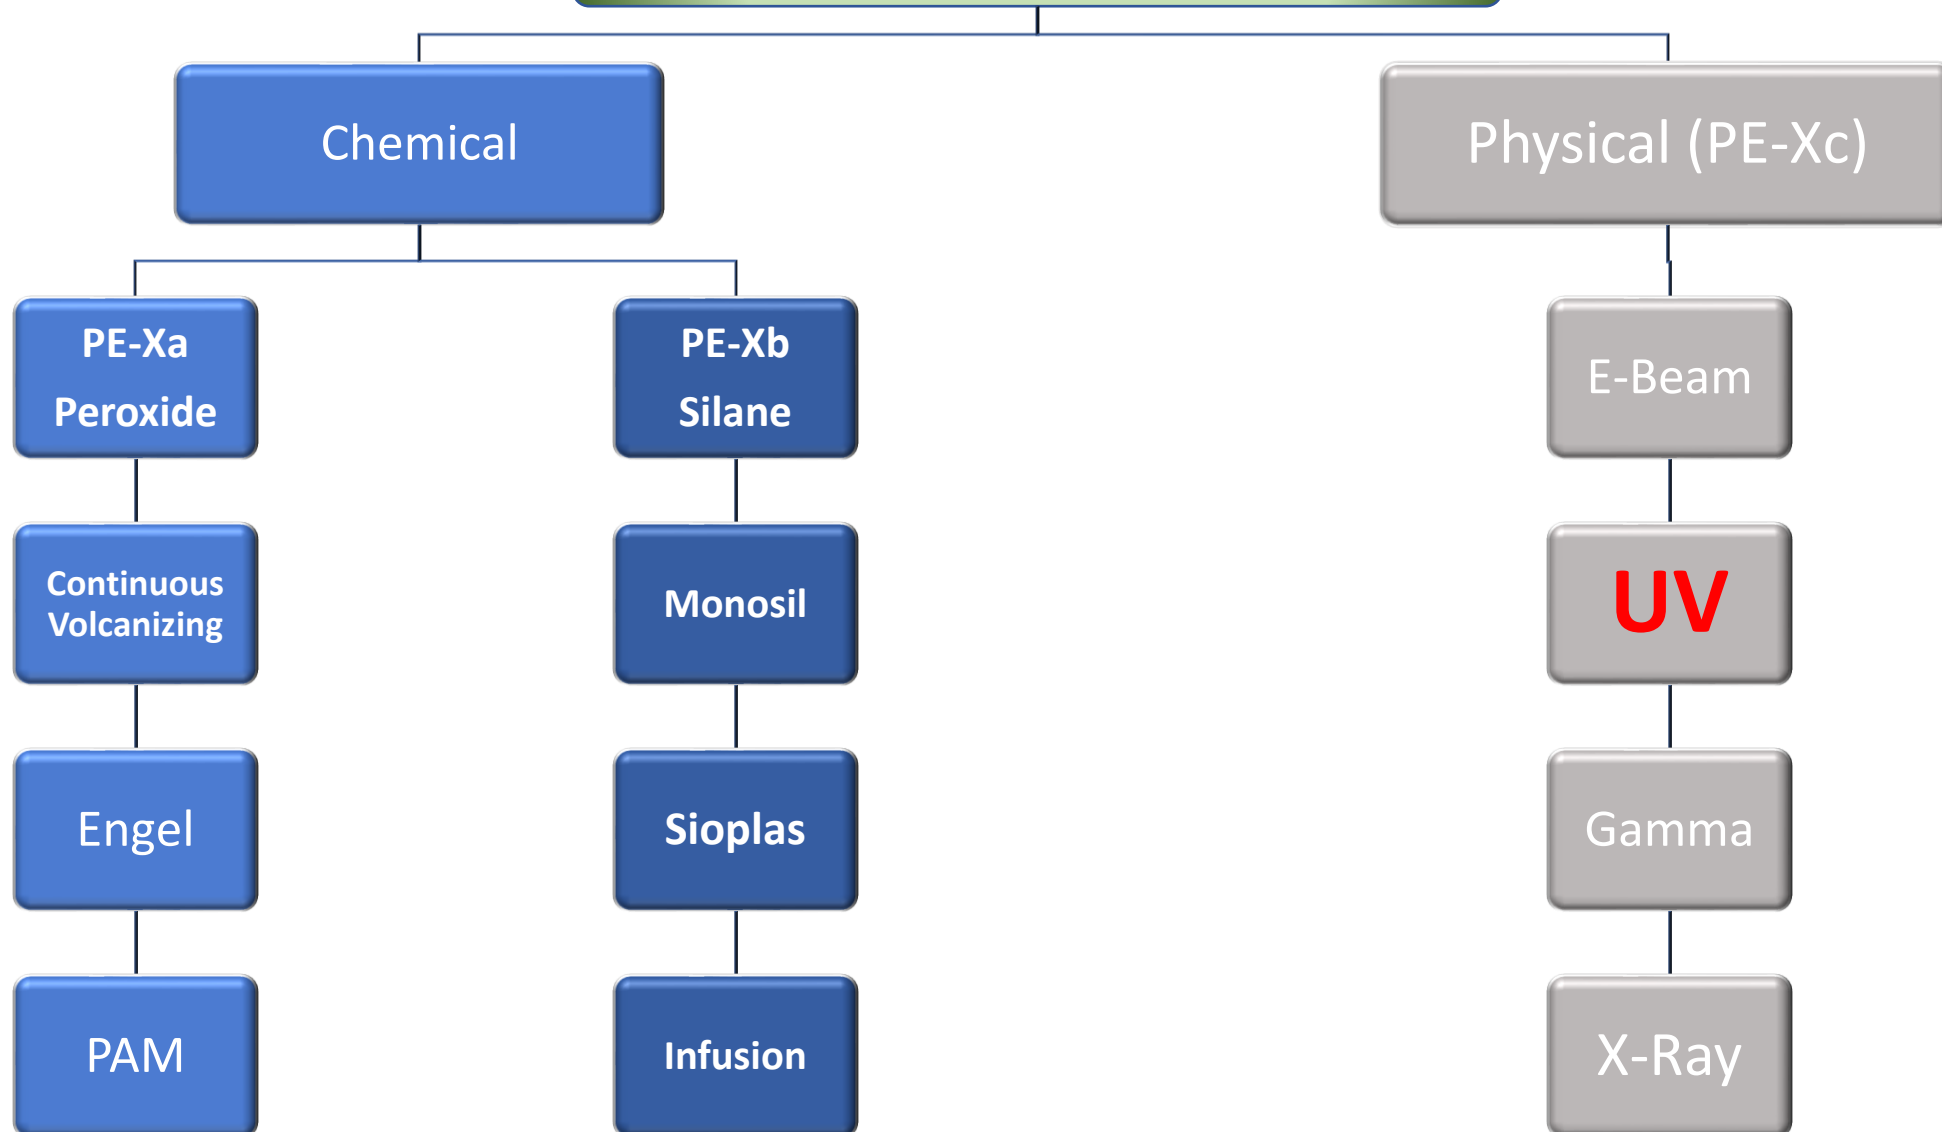

Chemical Crosslinked cables: what crosses your mind?

- Pre-crosslinking
- Punctures
- Under-crosslinking
- Shrinkage
- Orange Skin
- The outcome of extrusion
- Operating conditions
- Special storage conditions

- *lumpy surface*
- *cable failures*
- *poor hot set*
- *choosing the right tools*
- *unacceptable appearance*
- *finding out too late*
- *leading to poor test results*
- *Shelf life*




Because the crosslink chemicals interfere with the extrusion process

An introduction to Photochemistry


The study of chemical reactions and physical behaviour that may occur under the influence of visible and/or ultraviolet light is called **Photochemistry**

Electromagnetic Spectrum

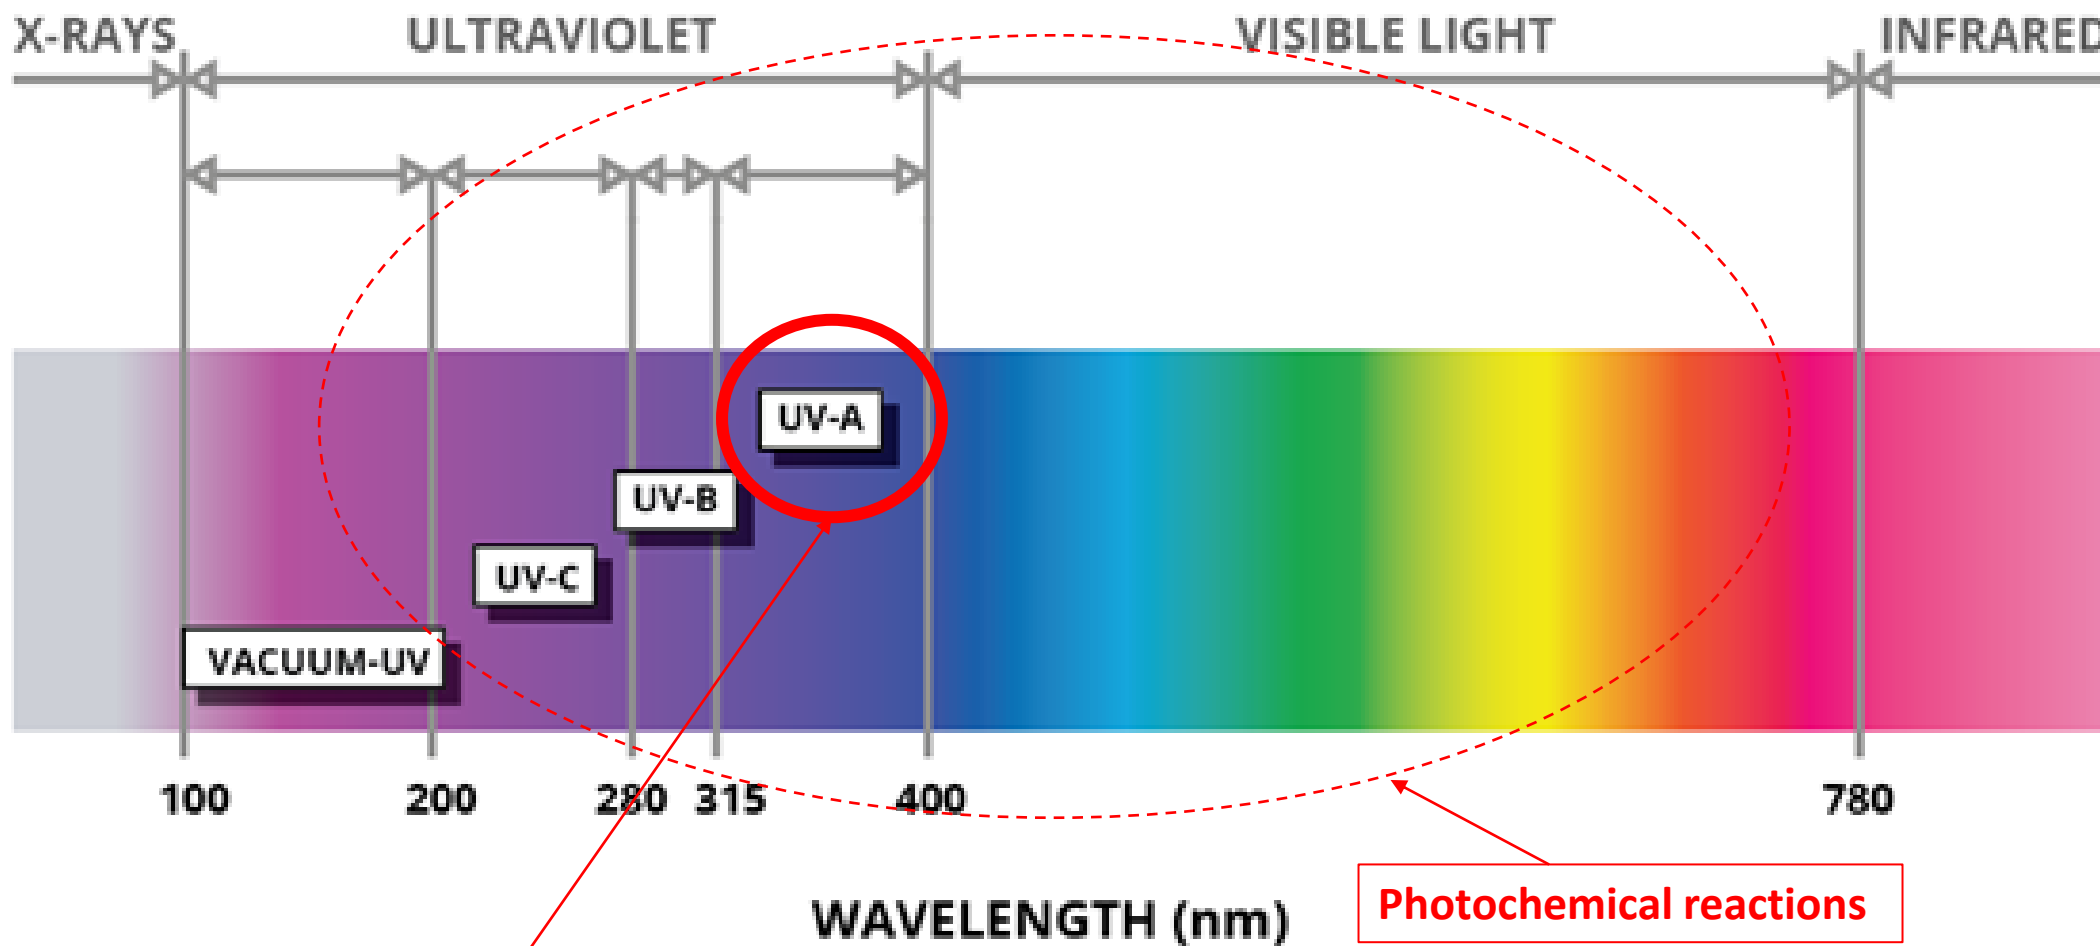

We focus on UV-A which is close to visible spectrum

Phosphorescence

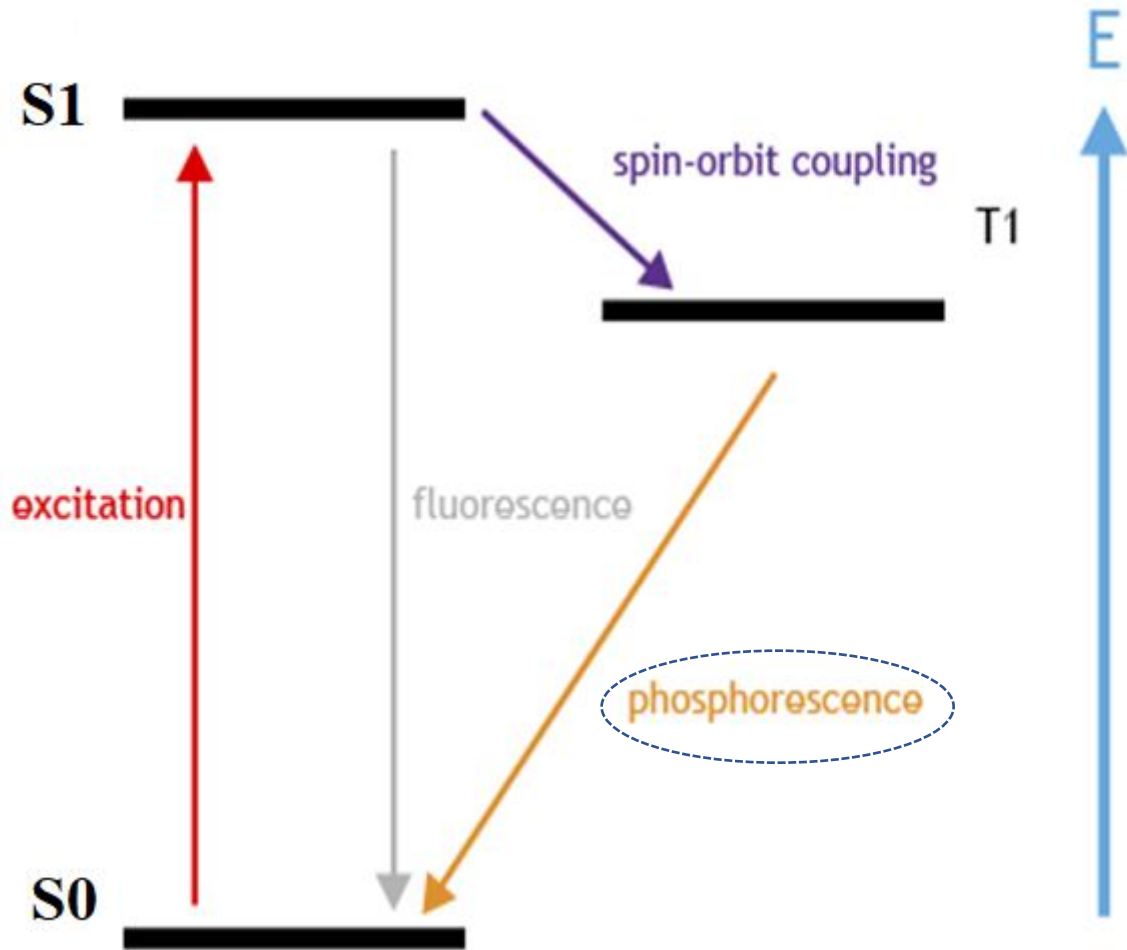

Examples of Phosphorescence

Glow in the dark stick



signage




Amount of Time for Interactions

Process	Transition	Timescale (sec)	
Light Absorption (Excitation)	$S_0 \rightarrow S_n$	10^{-15} (instantaneous)	
Internal Conversion	$S_n \rightarrow S_1$	10^{-14} to 10^{-11}	Just for perspective: The time the insulation spends in 1 meter UV chamber at a speed of 300m/min is 0.2 sec, and in that time there would have been at least 10^6 interactions many resulting in crosslink reactions
Vibrational Relaxation	$S_n^* \rightarrow S_n$	10^{-12} to 10^{-10}	
Intersystem Crossing	$S_1 \rightarrow T_1$	10^{-11} to 10^{-6}	
Fluorescence	$S_1 \rightarrow S_0$	10^{-9} to 10^{-6}	
Phosphorescence*	$T_1 \rightarrow S_0$	10^{-3} to 100	
Non-Radiative Decay**	$S_1 \rightarrow S_0$	10^{-7} to 10^{-5}	
	$T_1 \rightarrow S_0$	10^{-3} to 100	


**The singlet to triplet (or reverse) transition involves a change in electronic state. For this reason, the lifetime of the triplet state is longer than the singlet state and this allows the unpaired electron to undergo chemical reactions*

*Non-radiative decay** may take place by intermolecular energy transfer to a different molecule in a process called **quenching***

Summary of the process

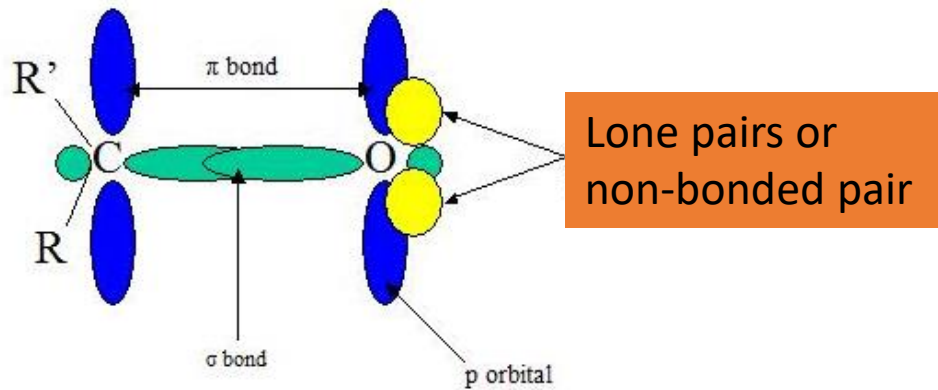

2nd step; **Free radical generation** with Carbon monoxide formation

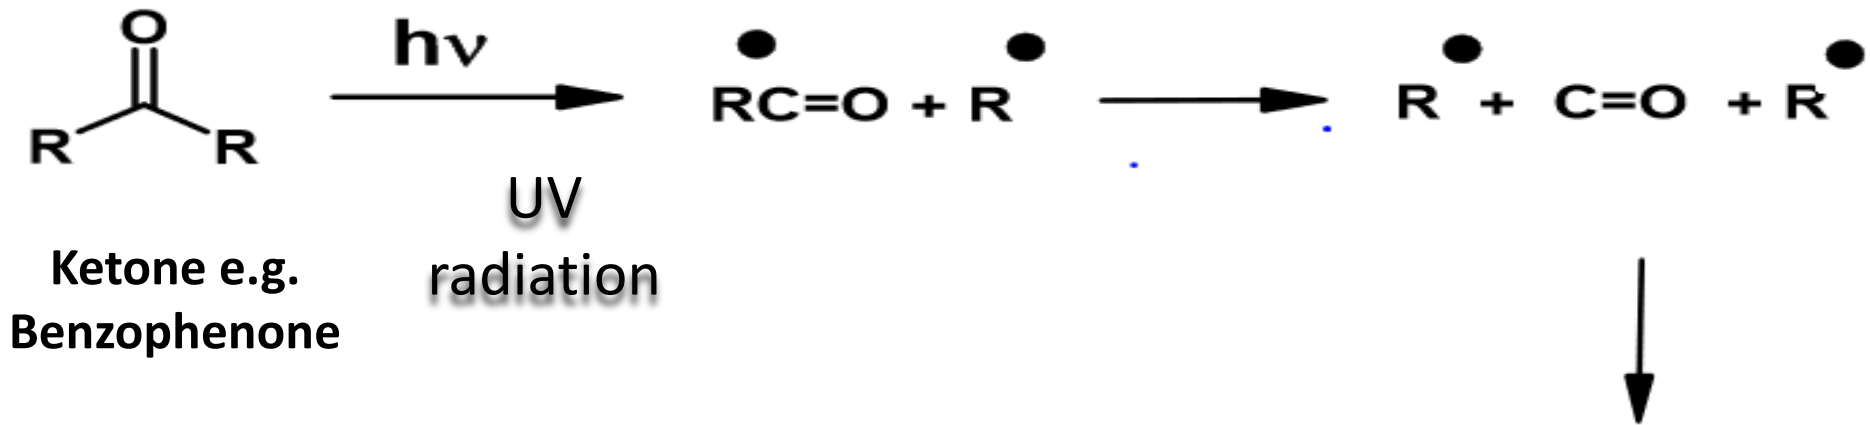

4th step; Polymeric free radical **combine** to form crosslink **chains**

3rd step; Free radical extraction of Hydrogen atom to produce **polymeric free radicals**

How is chemical and radiation crosslinking similar?

-Both require the formation of **free radicals** that extract hydrogen atoms from polymers to be crosslinked

-After hydrogen extraction, the polymeric **free radicals will react with other polymers** to form crosslink chains

Main UV crosslinking equipment

UV Radiator

Purpose: To provide the required amount (intensity) of the threshold frequency (**UV radiation**) that will promote Electrons to the anti bonding energy level (singlet & triplet) in order to **produce free radicals** that results in crosslinking reactions



Chiller

Purpose: The amount of heat generated would eventually lead to the damage of the LED lamps and the electronic components. It is imperative that the system be **kept below 50° C**.



Extractor


The excitation of electrons into free radicals would produce trace amount of **toxic gases e.g. Ozone, Oxides of N₂, Carbon Monoxide**. Such gases are harmful to the operators as well as the equipment.



Equipment setup in Extruder Line



No special construction or renovation of existing layout

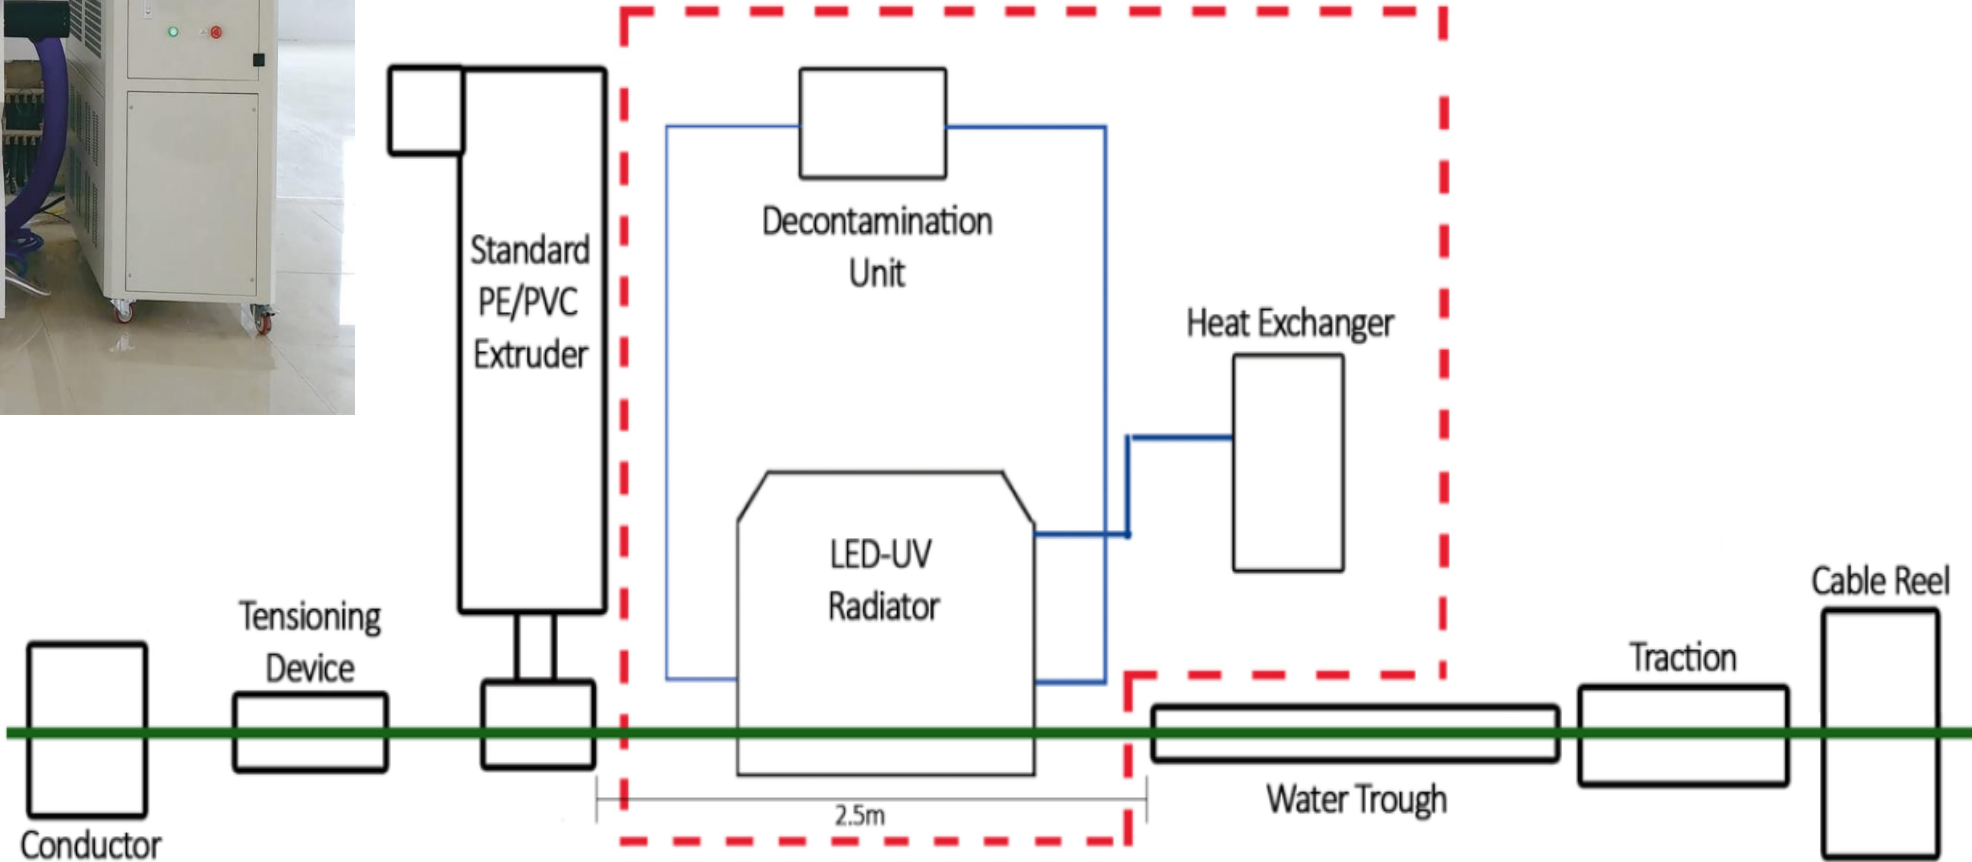

UV vs E-Beam - Physical method



Typical 2.5 MeV system

Cost : more than 1 Million USD
Also building cost should be added

Required Space

Land : 230 m²
Building height : 20m

Required Power

100 kW

UV Crosslinking system

Cost : 60,000 USD

Required Space : 2.5 x 2 = 5 m² ; Required Power : 20kW

UV Equipment setup and run (Video)

PRODUCTION OF LED-UV CROSSLINKED CABLES

ALCHEMIX PTE LTD

Products made using UV crosslinking

- **Low voltage XLPE**
- **Low voltage highly filled crosslinked cables (using CaCO_3) which is price competitive with PVC**
- **Medium Voltage Cables**
- **Crosslinked HFFR cables**
- **Using a masterbatch to make LV XLPE cables (recent innovation)**

UV crosslinked XLPE Type tests

Supplier	Plexchem Technologies Pte Ltd
Grade	UV LVXLPE 818C
Lot No	190421 MC-3
Purpose	Ageing Properties Improvement

The cable extrusion parameters listed below :

a) Cable size	: 6.0 mm ² (copper)
b) Screw Speed	: 20.0 rpm
c) Line Speed	: 30 m/min
d) UV Power	: 70%
e) Melt Temperature	: 170°C - 180°C

1. Tensile strength and Elongation at Break (Before Ageing)

No. of specimens / Colors	Sample 1 / Natural	Sample 2 / Natural	Sample 3 / Natural
Tensile Strength (>12.5 N/mm ²)	19.76	21.91	20.44
Elongation at Break (> 200%)	454	447	489

2. After ageing without conductor (135°C, 168 hours)

Tensile Strength (>12.5 N/mm ²)	22.81	22.55	21.19
Max. Variation ± 25%	15.44	2.92	3.67
Elongation at Break (> 200%)	441	420	486
Max. Variation ± 25%	-2.86	-6.04	-0.61

3. After ageing with conductor (150°C, 168 hours)

Tensile Strength (>12.5 N/mm ²)	20.01	19.71	19.93
Max. Variation ± 30%	1.27	-10.04	-2.50
Elongation at Break (> 200%)	408	419	454
Max. Variation ± 30%	-10.13	-6.26	-7.16

...Type tests

4. Hot Set and Shrinkage Test


Shrinkage (< 4 %)	0	0	0
Hot set (Under Load < 175 %)	85	70	90
Permanent Set (Cooling < 15 %)	5	0	0

5. Bending Test After Ageing(150°C, 240 hours)


No of turns (6)	No Crack	No Crack	No Crack
-------------------	----------	----------	----------

6.Oxidative Induction Time (OIT) minutes


Before Ageing	264	315	315
After ageing with conductor (150°C, 168 hours)	246	257	259

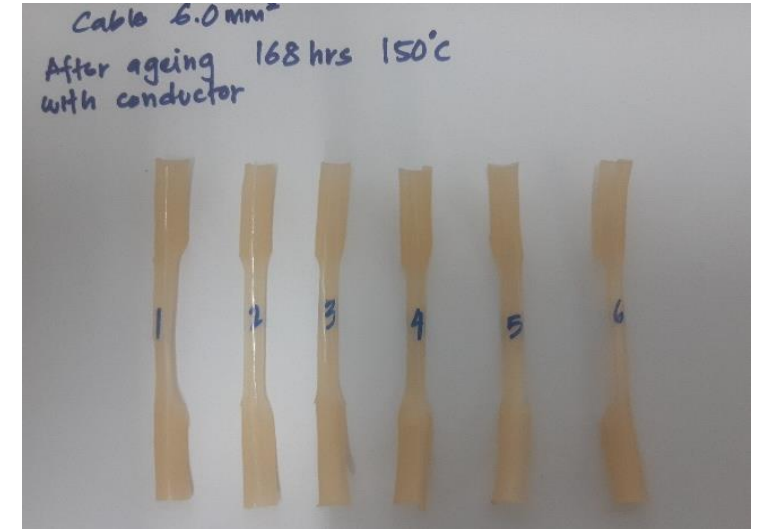

After Ageing 150°C, 168 hours with conductor

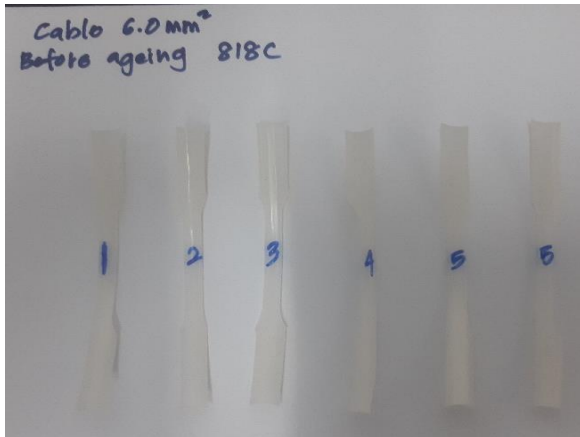

Before Ageing

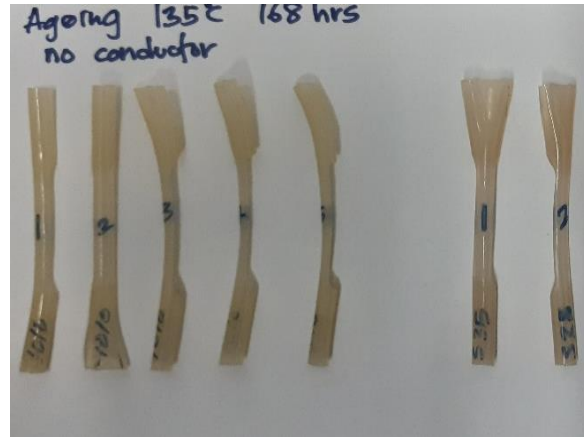

After Ageing 135°C, 168 hours without conductor



Bending Test After Ageing 150°C, 240 hours

XL/HFFR insulation as PVC substitute for internal Wiring

BS EN 50363-5

BRITISH STANDARD

Insulating, sheathing
and covering materials
for low voltage energy
cables

Part 5: Halogen-free, cross-linked
insulating compounds

BS EN 50525-2-3

BS EN
50363-5:2005

BS EN 50525-2-31:2011



BSI Standards Publication

Electric cables — Low voltage
energy cables of rated voltages
up to and including 450/750 V
(U_0/U)

Part 2-31: Cables for general applications
— Single core non-sheathed cables with
thermoplastic PVC insulation

BS EN 50525-3-41

BS EN 50525-3-41:2011



BSI Standards Publication

Electric cables — Low voltage
energy cables of rated voltages
up to and including 450/750 V
(U_0/U)

Part 3-41: Cables with special fire
performance — Single core non-sheathed
cables with halogen-free crosslinked
insulation, and low emission of smoke

An Alternative to PVC Insulation ?

- An inexpensive crosslinkable compound
- Would be 90°C rated
- Halogen free
- Low smoke
- Low Acidity
- Colourable (except black)
- Speed up to 300m/min
- Not hazardous in manufacture & disposal
- No plasticisers

FR-XLPE

Material	USD /kg	Kg	USD
LLDPE	1.15	100	115
CaCO3	0.2	60	12
ATH	1	5	5
UV initiator	8	2.4	19.2
Silicon Oil	4	0.2	0.8
PE WAX	3	0.2	0.6
Anti Oxidant	8	0.1	0.8
MAH	4	4	16
Total material cost		171.9	179.6
Compounding			\$ 200
Cost (per ton)			\$ 1,186

Test results – EI5 grade

Ref No	Test	Unit	Test method described in IEC 60811		Requirement	Results
			Section	Clause		
1 Mechanical Properties						
1.1	Properties before aging		1-1	9.1		
1.1.1	Values to be obtained for the tensile strength					
	median value , min	N/mm2			10	20
1.1.2	Values to be obtained for the Elongation at break					
	median value , min	%			125	256
1.2	Properties after aging in air oven		1-2	8.1.3.1		
1.2.1	Aging condition					
	Temperature	C			135+/-2	
	duration of temerature	h			7x24	
1.2.2	Values to be obtained for the tensile strength					
	median value , min	N/mm2			---	
	variation , max	%			+/- 30	4.3
1.2.3	Values to be obtained for the Elongation at break					
	median value , min	%			+/- 30	11.6
	variation , max	%				
2 Hot Set Test						
2.1	Condition of treatment		2-1	9		
	Temperature	C			200 +/- 3	
	Time under load	min			15	
	mechanical stress	N/cm2			20	
2.2	Test requirements					
	max elongationunder load	%			100	65
	max elongationunder after loading	%			25	4
3 Pressure test at high temperature						
3.1	Test condition		3-1	8.1		
	Forced exerted by the blade	N	3-1	8.1.4		
	duration of heating under load	h	3-1	8.1.5		
	Temperature	C			100 +/- 2	
3.2	Results to be obtained					
	median of the depth of indentation	%			50	22


4 Bending at low temperature						
4.1	Test Conditions:		1-4	8.1		
	Temperature	C			-15 +/-2	
	period of application of low temperature	h	1-4	8.1.4		
4.2	Results to be obtained					Passed
5 Elongation test at low temperature						
5.1	Test Conditions:		1-4	8.3		
	Temperature	C			-15 +/-2	
	period of application of low temperature	h	1-4	8.3.4		
5.2	Results to be obtained					
	Elongation without break , min	%			30	110
6 Ozone resistance test						
6.1	Method A		2-1	8		
	Test temperature	C			25 +/-2	
	Test duration	h			24	
	Ozone concentration (by volume)	%			250 to 300 E-4	
6.2	Method B		EN 50396	8.1.3		
	Test temperature	C			40 +/- 2	
	Test duration	h			72	
	Ozone concentration (by volume)	%			200 +/- 50 E-6	
6.3	Results to be obtained					Passed
7 Assessment of halogens						
7.1	PH , min		EN 50267-2-2		4.3	6.2
7.2	Conductivity, max	microS/mm	EN 50267-2-2		10	less 0.5
7.3	Amount of halogen acid gas					
	HCl and HBr , max	%	EN 50267-2-1		0.5	Passed
	HF, max	%	EN 60684-2		0.1	Passed
8 Oxygen Index						
		%	Additional	test		29

Advantage of FR-XL in rating factor

Rating of 90°C insulation is **26%** higher than 70°C insulation in different temperature

Derating factor of current rating

Ambient Temperature	Rated Temp 70°C	Rated Temp 90°C	Extra Rating
30	1.00	1.00	
35	0.94	0.96	2%
40	0.87	0.91	5%
45	0.79	0.87	10%
50	0.71	0.82	15%
55	0.61	0.76	25%
60	0.50	0.71	42%
65	0.35	0.65	86%

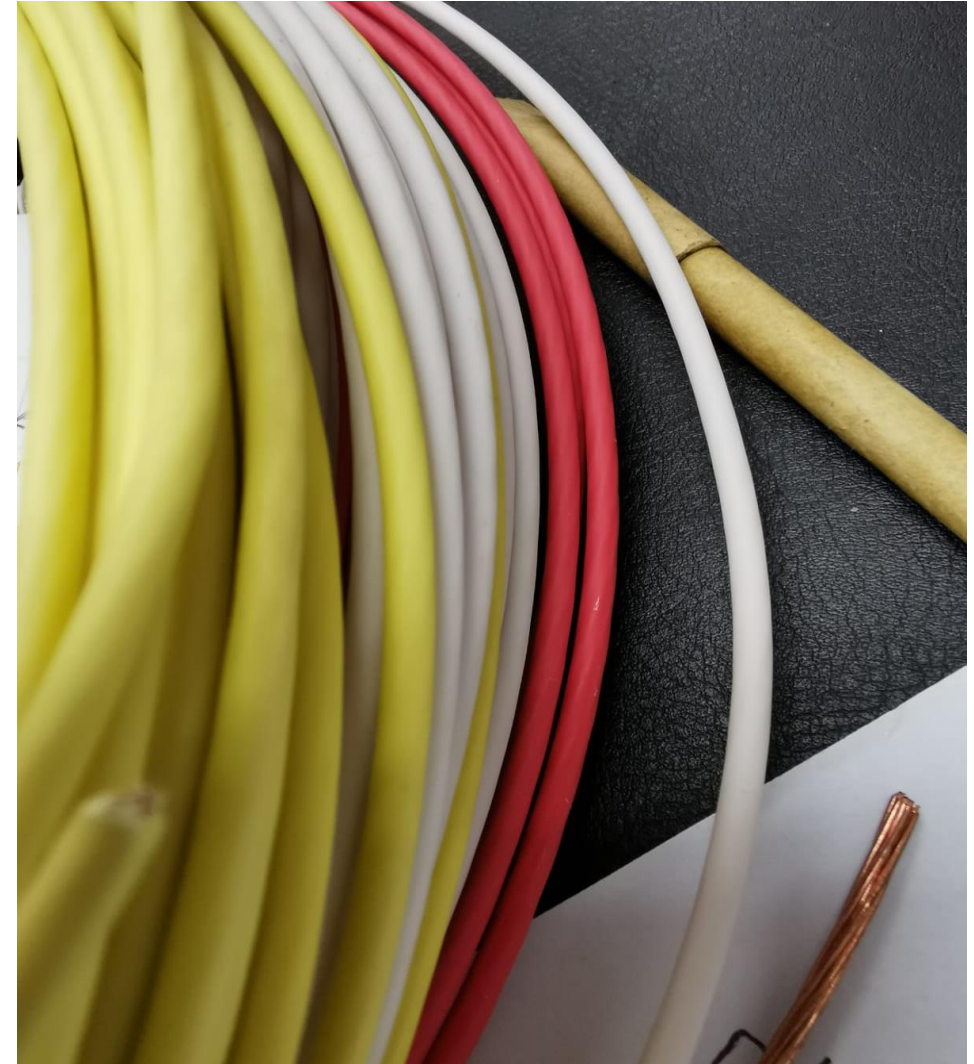

Cost Effectiveness

Wire Size	Conductor			NYA	NHX	PVC		FR-XL		NYA	NHX	Extra Rating
	No.	Wire Día	Diameter			Insulation Thickness	Price 1kM insulation USD	Current Rating Air (A)				
1.5	30	0.25	1.59	0.7	0.7	13.1	12.6	14.5	19	31%		
2.5	50	0.25	2.05	0.8	0.8	18.7	17.9	19.5	26	33%		
4	56	0.3	2.60	0.8	0.8	22.3	21.4	26	35	35%		
6	84	0.3	3.19	0.8	0.8	26.2	25.1	34	45	32%		
10	80	0.4	4.15	1.0	1.0	42.2	40.5	46	61	33%		
16	126	0.4	5.21	1.0	1.0	50.9	48.8	61	81	33%		
25	196	0.4	6.50	1.2	1.2	75.7	72.7	80	106	33%		
35	276	0.4	7.71	1.2	1.2	87.6	84.1	99	131	32%		
50	396	0.4	9.23	1.4	1.4	122.0	117.1	119	158	33%		
70	360	0.5	11.00	1.4	1.4	142.3	136.6	151	200	32%		
95	475	0.5	12.64	1.6	1.6	186.7	179.3	182	241	32%		
NYA	EN 50525-2-31 (H07V-K)									33%		
NHX	EN 50525-3-41 (H07Z-K)											

Cost of FR-XL is almost the same as PVC , with many safety advantages

With higher copper prices, it preserves the higher current carrying capacity

Using FR-XL provides vantage point for manufacturers committed to quality against ones using rubbish PVC in the market.

Cross-linked Halogen Free compounds




Grade	Plexlink 2235X-UV			
Description	Crosslinkable, halogen free, low smoke flame retardant.			
Application	Insulation and sheathing compound for cables.			
Material Designation	EN 50264-1 type EI 109 & EM 104			
Properties	Test Method	Unit	Specification	Typical Value
Density	ASTM D 792	g/cm3	-----	Approx. 1.5
Tensile Strength	IEC 811-1-1	MPa	> 10	14.0
Elongation at Break	IEC 811-1-1	%	> 150	190
HOT set test after UV curing	IEC 811-2-1			
Elongation under load %	(200°C , 15 min	%	< 100	55
Permanent Elongation after cooling	20 N/cm2)	%	< 25	5
After Ageing at 135°C, 168 hrs				
Tensile Strength	IEC 811-1-2	MPa	> 10	14.0
Max. Variation		%	+/- 30	+ 11
Elongation at Break	IEC 811-1-2	%	> 150	170
Max. variation		%	+/- 30	- 6
After Ageing at 120°C, 240 hrs				
Tensile Strength	IEC 811-1-2	MPa	> 10	14.5
Max. Variation		%	+/- 30	+ 16.5
Elongation at Break	IEC 811-1-2	%	> 125	165
Max. variation		%	+/- 30	- 8
Ozone resistance test	EN 50305	-----	No crack	All PASS
Method A 250-300 x10-4 , 25°C , 24 h			No crack	
Method B 20+/-50 x10-6 , 40°C , 72 h				
Water Absorption Test, after 70°C, 168 hrs	IEC 60811-1-3			
Max. Weight increase mg/cm2		Mg/cm2	15	6
Mineral Oil resistance with IRM 902	IEC 60811-2-1			
Tensile Strength , Max variation		%	+/- 30	15
Elongation at break , Max variation	100°C , 72h	%	+/- 40	20
Fuel resistance with IRM 903	IEC 60811-2-1			
Tensile Strength , Max variation		%	+/- 30	12
Elongation at break , Max variation	70°C , 168h	%	+/- 40	26

PLEXLINK 2235X-UV

Complying EI 109 & EM 104 EN 50264-1

Bending test at low temperature	IEC 60811-1-4	---	No cracks	PASSED
Elongation at low temperature , Min	-40 °C	%	30%	>100 %
Pressure test at high temperature (100°C , 4 h)	IEC 811-3-1	%	< 50	23
Flame Retardant (Vertical Burning)	IEC 60332-1			
Distance between: Lower edge of top clamp & onset of charred portion		mm	> 50	200
Bunched Cable test	IEC 60332-3-24	mm	≥ 2.5 m	PASS
Oxygen Index	ASTM D 2863	%	> 30	32
Smoke Density	ASTM D2843	Dm	< 40	20
ACID and Alkaline resistance , 23°C , 168 h	EN 60811-2-1	%	+/-30	12
Tensile strength max variation		%	+/-100	27
Elongation at break variation , max		%		
Toxicity Index (ICT) max	EN 50305	-----	3	1
Acid Gas Emission	IEC 60754-2			
- pH	EN 50267-2-2	---	> 4.3	5.1
- conductivity		µS/mm	< 10	1.0
Amount of Halogen gas ; HCL , HBr	EN 50267-2-1		<0.5	0.2
HF	EN 60684-2		<0.1	0.08

MV Spaced Cables

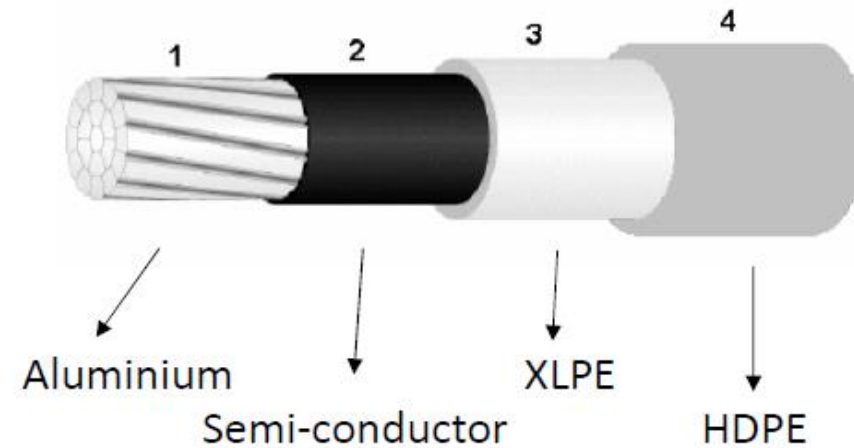

Production of MV Spaced cable (Video)




Test results of Spaced cable production

PRODUCT DESCRIPTION :					
336.4 MCM 34.5KV ACSR COVERED CONDUCTOR TREEWIRE					
REEL NO. 20160 - 10742 (693meters)	UV LED @ 70% power	Compound: PLEXLINK 271 MV compound		REFERENCE SPECIFICATIONS : MERALCO SPECS	
SUMMARY OF RESULTS					
Properties	STANDARD	10 mpm	15 mpm	20 mpm	Remarks
1. XLPE Insulation					
Wall Thickness, mm	2.858 min.	3.47 - 4.65	3.51 - 4.61	3.42 - 4.73	Complied
	3.175 min. ave.	4.06	4.06	4.08	Complied
Tensile Strength, MPa	12.5 min.	15.09 / 14.95	14.63 / 15.10	15.64 / 13.54	Complied
Elongation, %	250 min.	538.31% / 530.15%	552.85% / 524.44%	518.97% / 470.14%	Complied
Hot Creep Test, 150±2°C for 15mins.					
Maximum Elongation under Load	175% max.	100% (outer portion)	90% (outer portion)	100% (outer portion)	Complied
		100% (inner portion)	100% (inner portion)	110% (inner portion)	
Hot Set, 150±2°C for 5mins.					
	10% max.	0% (outer portion)	0% (outer portion)	0% (outer portion)	Complied
		0% (inner portion)	0% (inner portion)	0% (inner portion)	
2. Electrical Properties					
AC Voltage Test	Withstand 35 kv for 1 min.	Withstand 35 kv for 1 min.			Complied

Test results of Spaced cable production

PRODUCT DESCRIPTION :			
3/0 AWG 34.5KV ACSR COVERED CONDUCTOR TREEWIRE			
REEL NO.	QTY	REFERENCE SPECIFICATIONS :	
20160 - 10744	527	MERALCO SPECS	
SUMMARY OF RESULTS			
Properties	STANDARD	ACTUAL	Remarks
2. XLPE Insulation			
Wall Thickness, mm	2.858 min.	3.45	Complied
	3.175 min. ave.	3.66	Complied
Tensile Strength, MPa	12.5 min.	12.69 / 13.94 / 14.02	Complied
Elongation, %	250 min.	426.35% / 418.43% / 466.58%	Complied
Hot Creep Test, 150±2°C for 15mins.			
Maximum Elongation under Load	175% max.	130	Complied
Hot Set, 150±2°C for 5mins.	10% max.	0	Complied
5. Electrical Properties			
Rated Voltage	34.5 kV	34.5 kV	Complied
AC Voltage Test	Withstand 35 kv for 1 min.	Withstand	Complied

Quality of surface - comparisons

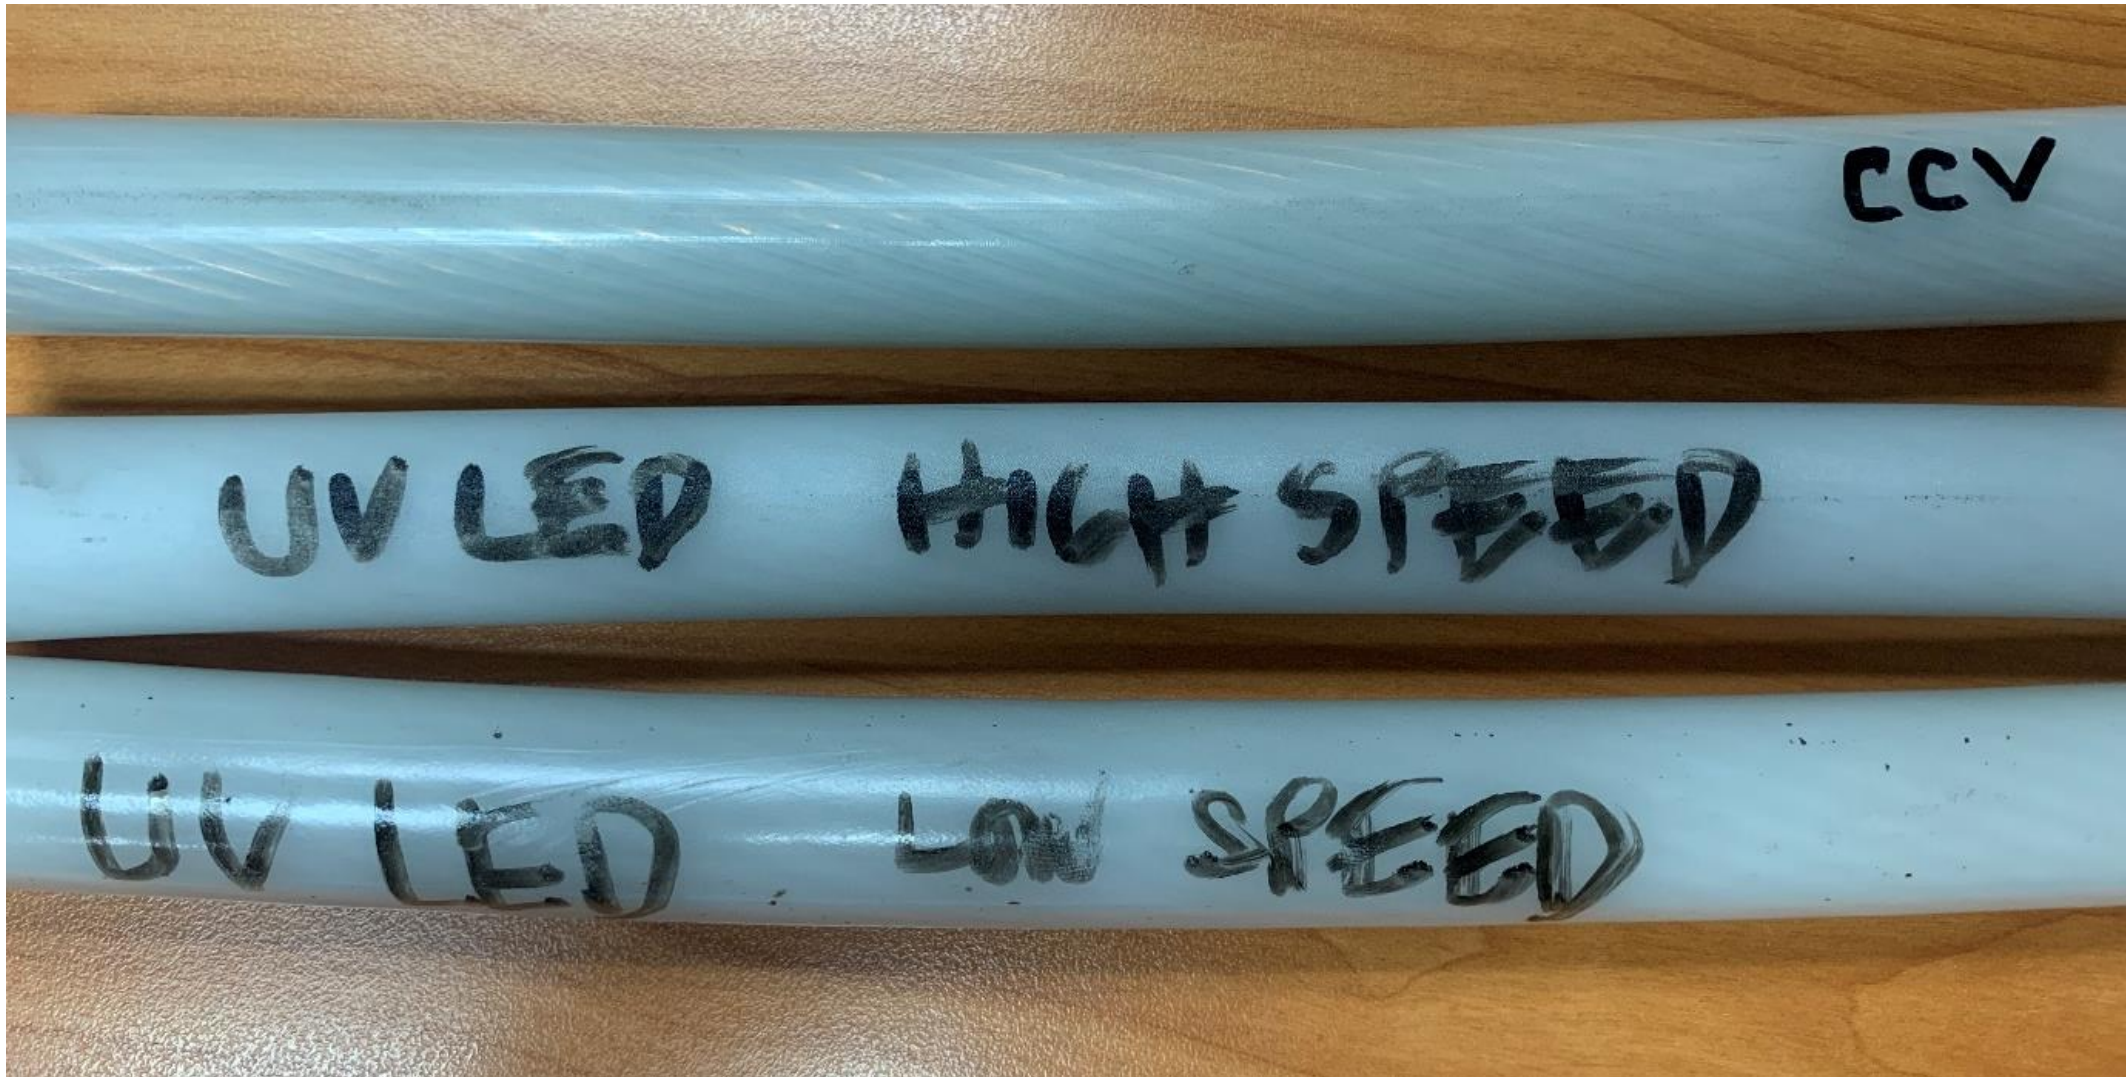

Production of LV XLPE cables using a masterbatch

- A masterbatch containing UV MB photo initiators & Regular commodity PE: LLDPE (MI 2-4), LDPE (MI 1-2).
- Mixed in a simple tumble mixer in the ratio of 25 Kgs of Masterbatch & 75 Kg of LL or LD.
- Inexpensive, long shelf life & with excellent properties.

cost of using the masterbatch						
Product	price USD*	Kg	\$	Kg	\$	
LL	1.15	75	86.25	0	0	
LD	1.5	0		75	112.5	
UV MB	2.3	20	46	20	46	
		95	132.25	95	158.5	
your compound cost			1.39		1.67	
* cost landed Singapore						



今化科技

今化科技(武汉)有限公司

产品名称: UVF1805 批号: 试机日期: 2021-06-24

调试原因: _____ 试机数量: _____

检测报告

客户名称	江西省越光电缆股份有限公司			报告号	JHQC21062401	
试样名称	本色绝缘黄色色带电力电缆	样品数量	----	样品编号	JXYG3010	
设备规格	-----	螺杆类型	等距不等深带双螺纹	模具	挤管式	
温度参数℃	150, 160, 170, 175, 185, 195, 210, 230					
主机螺杆转速	-----	出线速度	----米/分	主机电流	-----	
性能检测 标准依据:						
序号	检测项目		试样说明	单位	指标	检验结果
1	热延伸(200℃, 15min, 0.2MPa)	负荷下伸长率	黄线 1	%	≦175	25
			黄线 2			25
黄线 3	35					
	冷却后最大永久伸长率 200℃, 5min		黄线 1	%	≦15	-5
			黄线 2			-5
			黄线 3			-2.5
2	收缩率 130℃ 1小时		自交联 72H	%	≦4	0

注: 黄线 3 为色带线条

检测员: 李子奎

审核: 张志育

检测日期: 2021-06-29



今化科技

今化科技(武汉)有限公司

产品名称: UVF1805 试机日期: 2021-06-24

调试原因: _____ 试机数量: _____

检测报告

性能检测		标准依据: JBT12706-2008			
序号	检测项目	试样说明	单位	指标	检验结果
3	拉伸强度	黄线1	Mpa	≥13.5	21.9
4	断裂伸长率	黄线1	%	≥350	860
5	空气热老化 (135℃, 168h)				
5.1	拉伸强度变化率	黄线1	%	≡20	+5.6
5.2	断裂伸长率变化率	黄线1	%	≡20	-8
6	介电强度	黄线1	MV/m	≥25	40

检测员: 李子奎

审核: 张志育

检测日期: 2021-6-2



Summary of Advantages

- **Low cost of equipment** (About USD60K)
- **Ease of processing** and cleaning
- Inexpensive cost of compound with **long shelf life**
- Low energy consumption. **Only 20KW**
- **No need** for extensive **modification** of production facility
- Extrusion of PE/HFFR thermoplastic with **no pre-crosslinking** issues
- High draw down = **reduced material consumption**
- **Post production** operations could be done **immediately**
- Processing **XL-HFFR** cables



Next Phase of Development

- UV protected cables (2.5% carbon black content).

High concentration of carbon black; blocks UV penetration and requires a special formulation.

Difficult for co-extrusion, if outer semi con is required. Must be extruded in tandem

- Speed adaptation of equipment especially for thin insulation. Our current systems allows for speeds up to 350m/min
- Limitation on high insulation thickness (more than 6 mm)
- Side reactions of photo initiators forms organic by products which are flammable. Reduces effectiveness in HFFR formulations.
- High degree of Crosslink (typical hot set is <40%) reduces elongation values.
- Special colours masterbatches have to be used.
- EPDM insulation (soon).

Safety Requirements



- **Irradiation.** Never look into the beam of a high power LED; the lights very high intensity damage your eyes.
- **Ozone generation:** Short wavelength (λ , 240nm) light may generate ozone from oxygen (however our wavelength is between 350-400nm) and our unit comes with a well ventilated fume system.
- **Lamps:** Most lamps operate at high temperature and at high vapour pressure. Never move or touch lamps during operation.



**Thank you for
your attention**

